

# AnyTone®



## T7 4V Full Netcom Digital Trunking Radio Network Function

- Android 5.1 Operating System.
- Support WIFI, GPS, Bluetooth, NFC(optional)
- Front camera 200W, rear camera 800W.
- 2.4 inch TFT touch screen 240\*320
- Support Video, Recording and the upload of RVC, Recording etc.
- Support TF card expand ( Max 64G).
- Support Call, SMS and queries of Calling records.
- Meet the various needs of user Trunking intercom, with Individual calls, Single call, Group call, Recording, Monitor, Remote kill etc.
- Large speaker with high fidelity sound.
- Platform: REAL PTT, and will support ZELLO, AnyTone etc. in the future.
- Man Down Alarm function(Optional)




### Specification

CPU	QUALCOMM MSM8909 Quad-core 1.1GHz
RAM	8GB ( EMMC ) +1GB ( DDR2 )
Operating System	Android 5.1
EU frequency band (EU version)	GSM: Band2/3/5/8; WCDMA: Band1/2/5/8; TDD-LTE: Band38/40; FDD-LTE: Band1/2/3/5/7/8/20/28;
USA frequency band (US version)	GSM: Band2/5; WCDMA: Band1/2/4/5/8; FDD: Band1/2/4/5/7/12/13/17/25/26
Max Data Rate	Uplink: 50Mbps; Downlink: 150Mbps
Voice Scheme	SRLTE, CSFB
Screen	2.4 inch TFT touch screen 240*320
Extended Memory	Support TF Card (Expanded to 64G)
Camera	Front camera 200W, rear camera 800W
Battery	3.7V, 5200mAh
GPS	1575 ± 2MHz
wifi	802.11b/g/n
Bluetooth	4.0
Optional Function	NFC(4200mAh battery with NFC)
Size	59x43x124mm ( without antenna )
Weight	253g (with 5200mAh battery )

### Standard Accessories



### Optional Accessories

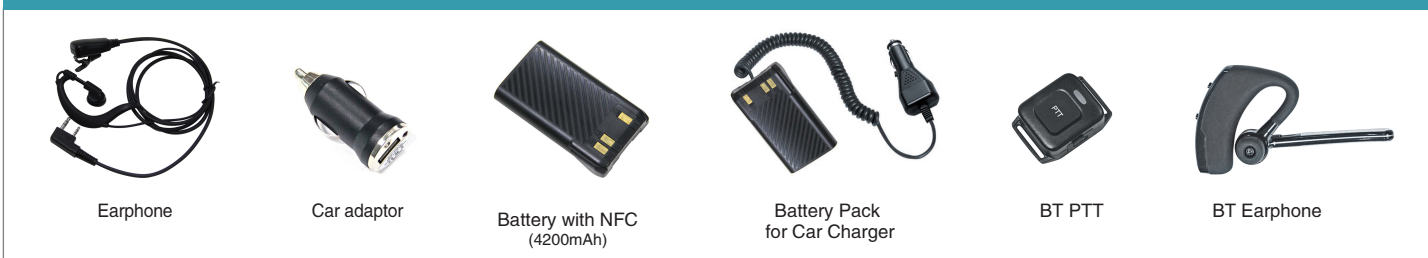

A2.201210

## Qixiang Electron Science & Technology Co., Ltd.

Contact person: **KEN XU (General Manager)**

Address: Qixiang Building, Tangxi Industrial Zone, Luojiang District, Quanzhou 362011, Fujian Province, China.

Tel: 86-595-22656925/6

Fax: 86-595-22656927

E-mail: ken6833@qxdz.cn    xqlx5555@126.com

Website: <http://www.anytone.net>    <http://www.qxdz.cn>

